


## KY TYPE 10R / KY TYPE 10T



### Compatibility:

- John Crane TYPE 10R / TYPE 10T

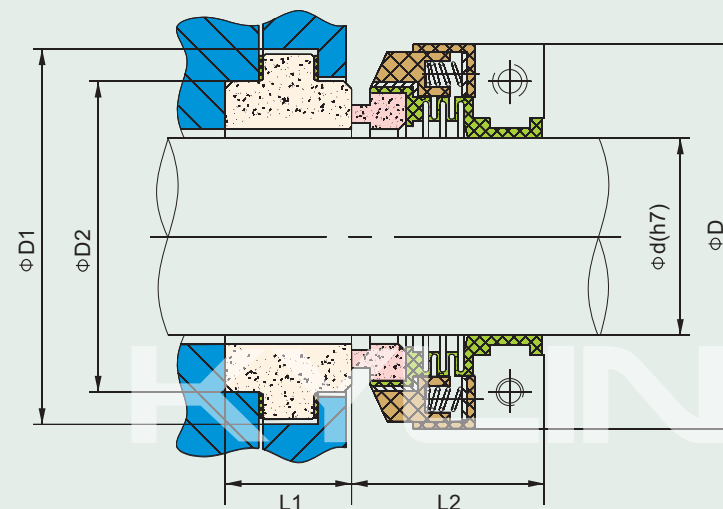

Part#	d	D	D1	D2	L1	L2
KY TYPE 10R / 10T-1"	25.4	60	54	42.86	17.6	33.2
KY TYPE 10R / 10T-1 1/8"	28.6	67	65	50.8	27	36.2
KY TYPE 10R / 10T-1 1/4"	31.75	69	68	53.98	27	37.2
KY TYPE 10R / 10T-1 3/8"	34.93	72	71	57.15	27	38.2
KY TYPE 10R / 10T-1 1/2"	38.1	76	78	63.5	27	38.2
KY TYPE 10R / 10T-1 5/8"	41.28	80	81	66.68	27	40.2
KY TYPE 10R / 10T-1 3/4"	44.45	84	84	69.85	27	40.2
KY TYPE 10R / 10T-1 7/8"	47.63	86	87	73.03	27	43.2
KY TYPE 10R / 10T-2"	50.8	90	97	79.38	33.3	43.2

## Teflon Bellow Mechanical Seals

### Combined Materials

- Stationary Ring (Ceramic/SiC)
- Rotary Ring (Teflon/SiC)
- Secondary Seal (Teflon)
- Spring and Metal Part (Steel)

### Working Conditions

- Mediums: Sulfuric acid, hydrochloric acid, phosphoric acid, acetic acid, and nitric acid with various degrees, etc.
- Temperature:  $\leq 120^{\circ}\text{C}$
- Pressure:  $\leq 0.5\text{MPa}$       Speed:  $\leq 10\text{ m/Sec}$